MVF-001T

Diaphragm vacuum pumps

Predictable

- Stable behaviour under real operating conditions.
- Fewer adjustments. Fewer deviations.
- Costs under control from day one.

Accessible

- Quick, straightforward maintenance.
- Direct access to critical components.
- No unnecessary dependencies.

Direct response

- Direct intervention, no middlemen.
- We act on the complete system to reduce downtime and ensure continuity.

BUILT FOR RELIABLE PLANT OPERATION

Design built around real-world operation

Optimised for continuous duty

Stability under process conditions

Components built to last

Thermal stability

Less operational wear

Hassle-free maintenance

Direct access to key components

Fewer points of failure

Configured to the application

Variable speed drives, monitoring, versions (ATEX, Aqua, O2), tailored filtration

marpa vacuum 30 years

MVF-001T

Diaphragm vacuum pumps

PERFORMANCE CURVE

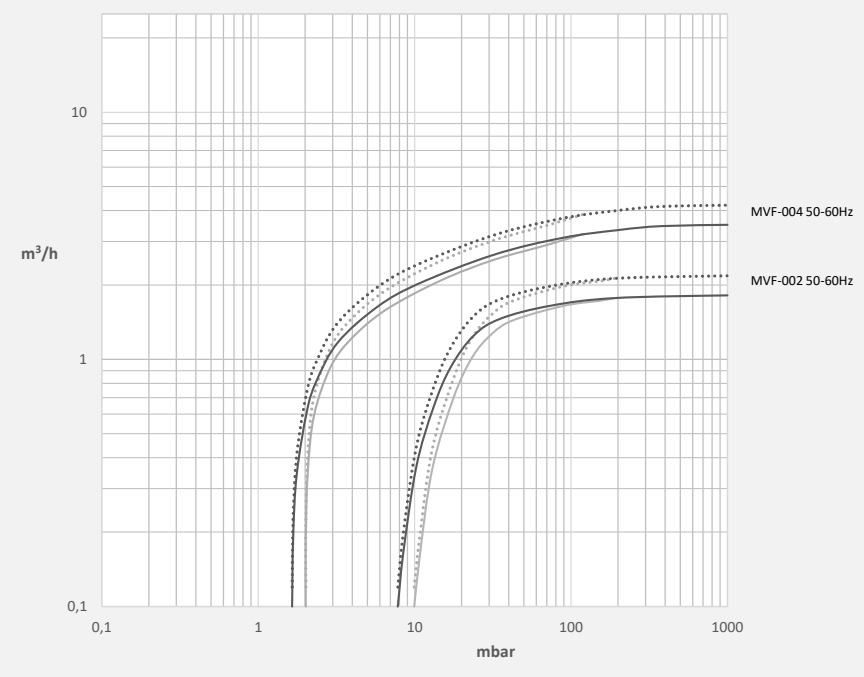

TECHNICAL SPECIFICATIONS

	MVF-001T
Nominal pumping speed	1.2 / 1.4 m³/h (50 / 60 Hz)
Ultimate vacuum / pressure	2 mbar (50 / 60 Hz)
Rated motor power	80 / 96 W (50 / 60 Hz)
Nominal motor speed	1400 / 1680 rpm (50 / 60 Hz)
Noise level (ISO 2151)	55 dB(A)
Approx. weight	≈ 7 kg
Dimensions (L x W x H)	330 × 143 × 212 mm

NEED INFORMATION ABOUT MVF-001T?
FULL DETAILS ON OUR WEBSITE

marpavacuum.com/en

Contact us
by scanning this QR code