

MVF-002D/H

Diaphragm vacuum pumps

(Image coming soon)



Predictable

- Stable behaviour under real operating conditions.
- Fewer adjustments. Fewer deviations.
- Costs under control from day one.



Accessible

- Quick, straightforward maintenance.
- Direct access to critical components.
- No unnecessary dependencies.



Direct response

- Direct intervention, no middlemen.
- We act on the complete system to reduce downtime and ensure continuity.

BUILT FOR RELIABLE PLANT OPERATION

Design built around real-world operation

Optimised for continuous duty

Stability under process conditions

Hassle-free maintenance

Direct access to key components

Fewer points of failure

Components built to last

Thermal stability

Less operational wear

Configured to the application


Variable speed drives, monitoring, versions (ATEX, Aqua, O2), tailored filtration

MVF-002D/H

Diaphragm vacuum pumps



PERFORMANCE CURVE

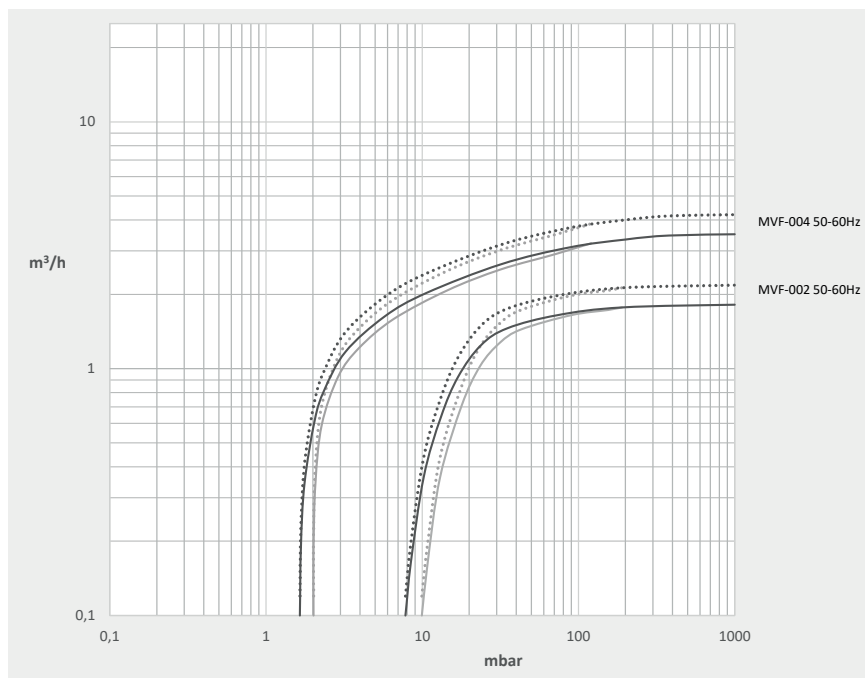

TECHNICAL SPECIFICATIONS

	MVF-002D	MVF-002H
Nominal pumping speed	2.0 / 2.4 m³/h (50 / 60 Hz)	2.0 / 2.4 m³/h (50 / 60 Hz)
Vacuum / pressure limit	8 mbar (50 / 60 Hz)	1 mbar (50 / 60 Hz)
Nominal motor rating	360 / 432 W (50 / 60 Hz)	360 / 432 W (50 / 60 Hz)
Nominal motor speed	1400 / 1680 rpm (50 / 60 Hz)	1400 / 1680 rpm (50 / 60 Hz)
Noise level (ISO 2151)	55 dB(A)	55 dB(A)
Approx. weight	≈ 10 kg	≈ 10 kg
Dimensions (L x W x H)	335 × 252 × 185 mm	335 × 252 × 185 mm

NEED INFORMATION ABOUT MVF-002D/H?
FULL DETAILS ON OUR WEBSITE

marpavacuum.com/en

Contact us
by scanning this QR code

