

# MVF-004T

Diaphragm vacuum pumps



## Predictable

- Stable behaviour under real operating conditions.
- Fewer adjustments. Fewer deviations.
- Costs under control from day one.



## Accessible

- Quick, straightforward maintenance.
- Direct access to critical components.
- No unnecessary dependencies.



## Direct response

- Direct intervention, no middlemen.
- We act on the complete system to reduce downtime and ensure continuity.

## BUILT FOR RELIABLE PLANT OPERATION

### Design built around real-world operation

Optimised for continuous duty

Stability under process conditions

### Hassle-free maintenance

Direct access to key components

Fewer points of failure

### Components built to last

Thermal stability

Less operational wear

### Configured to the application


Variable speed drives, monitoring, versions (ATEX, Aqua, O2), tailored filtration

# MVF-004T

Diaphragm vacuum pumps



## PERFORMANCE CURVE

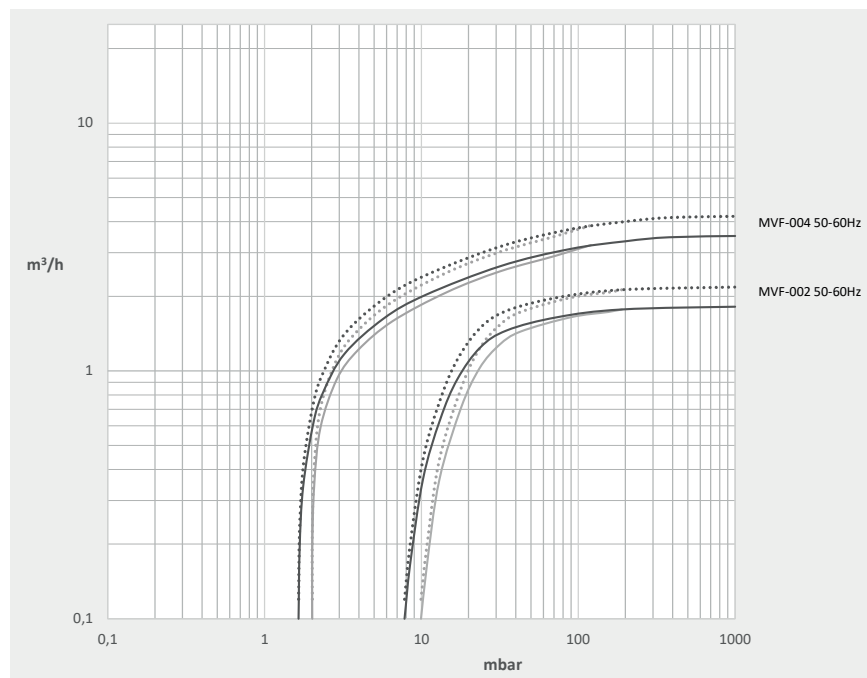

## TECHNICAL SPECIFICATIONS

| MVF-0004T               |                              |
|-------------------------|------------------------------|
| Nominal pumping speed   | 4.0 / 4.8 m³/h (50 / 60 Hz)  |
| Vacuum / pressure limit | 2 mbar (50 / 60 Hz)          |
| Nominal motor rating    | 360 / 432 W (50 / 60 Hz)     |
| Nominal motor speed     | 1400 / 1680 rpm (50 / 60 Hz) |
| Noise level (ISO 2151)  | 55 dB(A)                     |
| Approx. weight          | ≈ 10 kg                      |
| Dimensions (L x W x H)  | 335 × 252 × 185 mm           |

**NEED INFORMATION ABOUT MVF-004T?**  
**FULL DETAILS ON OUR WEBSITE**

[marpavacuum.com/en](http://marpavacuum.com/en)

Contact us  
by scanning this QR code

