


MVS-VP250E

Dry-running rotary vane pressure/vacuum pumps

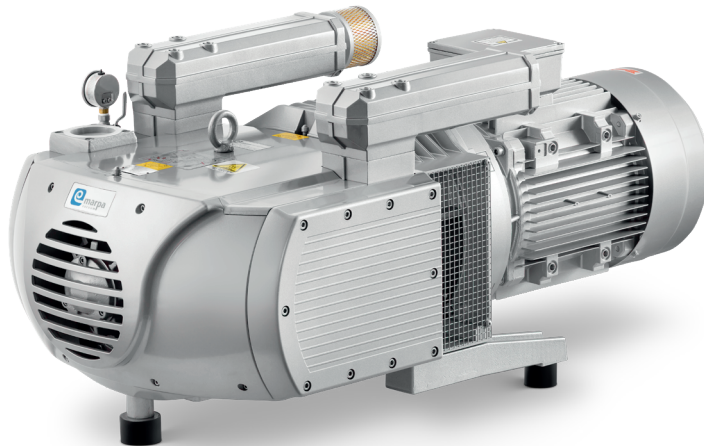

Predictable

- Stable behaviour under real operating conditions.
- Fewer adjustments. Fewer deviations.
- Costs under control from day one.



Accessible

- Quick, straightforward maintenance.
- Direct access to critical components.
- No unnecessary dependencies.



Direct response

- Direct intervention, no middlemen.
- We act on the complete system to reduce downtime and ensure continuity.

BUILT FOR RELIABLE PLANT OPERATION

Design built around real-world operation

Optimised for continuous duty

Stability under process conditions

Hassle-free maintenance

Direct access to key components

Fewer points of failure

Components built to last

Thermal stability

Less operational wear

Configured to the application

Variable speed drives, monitoring, versions (ATEX, Aqua, O2), tailored filtration

MVS-VP250E

Dry-running rotary vane pressure/vacuum pumps



DIMENSIONS

(More details coming soon)

TECHNICAL SPECIFICATIONS

	MVS-VP250E
Nominal pumping speed	250 / 300 m ³ /h (50 / 60 Hz)
Vacuum / pressure limit	±0.5 bar (50 / 60 Hz)
Nominal motor rating	7.5 / 9 kW (50 / 60 Hz)
Nominal motor speed	960 / 1150 rpm (50 / 60 Hz)
Noise level (ISO 2151)	81 / 81 dB(A) (50 / 60 Hz)
Approx. weight	≈ 312 kg
Dimensions (L x W x H)	1092 × 475 × 527 mm
Gas inlet / outlet	G 2 1/2" / G 2"

**NEED INFORMATION ABOUT MVS-VP250E?
FULL DETAILS ON OUR WEBSITE**

marpavacuum.com/en

Contact us
by scanning this QR code

